

# ARGACEM COLOURED

*Coloured finishing smoother*

Coloured smoothing paste for external walls, breathable and water-resistant, formulated with hydraulic binders, fillers of mineral origins and natural pigments, to be used as finishing paint.

## BENEFITS

- Breathable
- Water-repellent
- Fiber-reinforced
- No cracks
- Easy to apply
- Application directly onto the plaster, provided it is not extremely absorbent

## APPLICATION FIELDS

Coloured smoother for walls treated with *Diathonite*, old or new walls, even if damaged or with small cracks, provided to be stable and with a good anchoring on the substrate. Suitable for walls, ceilings or concrete structures.

## YIELD

Kg 1 - 1,5 if applied onto the existing smoother.  
Kg 3 - 3,5 if applied directly onto a levelled and smooth plaster.

## PACKAGING

25 Kg plastic bucket.

## COLOUR

All colours in Diasen colors folder. For particular colours contact Diasen Technical Dept.

## STORAGE

Store the product at temperatures between +5°C and +35°C.

Storage time: 12 months.

## Technical Data

Aspect	Dense paste
Weathering resistance	2000 hours with no remarkable changes
UV-rays resistance	1000 hours with no remarkable changes
Solid content	80%
Sea salt resistance	Excellent
Surface drying temperature	+5°C
Steam permeability	(High breathability) $\mu = 7$


## Finishes - Paste

# ARGACEM COLOURED

## APPLICATION

If applied directly onto the existing plaster, take care that the substrate is stable, solid and without dust or detaching parts. Apply at least 10 days after the last layer complete drying. Do not wet the surface before application. If the support is highly absorbent it is strictly suggested to apply first *D20* fixing primer.

1. Dilute the product with 10-20% of water.
2. Once the *D20* fixative is completely dry, apply a first coat by trowel, obtaining a levelled layer.
3. Once the first coat is dry, apply the second coat, without diluting the product.
4. After 15 minutes from last coat application, smooth the product using a sponge, working in clockwise direction.

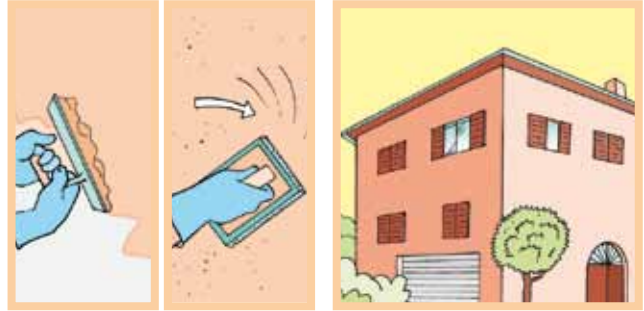

## SUGGESTIONS

- The substrate must be stable, solid and completely dry, without debris or detaching parts, efflorescences or organic materials.
- If applied onto a high-absorbing support, *D20* fixative is strictly suggested (see *Diasen Primer*).
- The application on the wall must be completed in one day, avoiding to apply the following coats the day after.
- The surface temperature must be between +5°C and +35°C.
- If applied directly onto a highly-unlevelled plaster, it is suggested to apply first a levelling smoother, such as *Argacem HP*.
- Wear protective clothing while handling the product.
- Wash tools with water.

## SAFETY

For the handling, see product safety sheet.