



PRS.0242

## CLAYSEAL 25.20 SW

Bentonite-rubber swelling joint,  
specific for usage with sea water

### Customs Code

4006 9000

### Packaging

- Box: 6 x (Roll 5 m)
- Pallet: 48 x (Box 21 Kg)

### Application

- Apply by hand
- Hamme

Family  
**Proseal**

Product Lines

- Aqua
- Infratech
- Sanageb

Components  
**Single-component**

Type

**Sodium bentonite based hydro expansive products**

Functional Categories

- **Waterproofing underground structures with hydro-expansive products**
- **Construction and maintenance interventions on airport runways and quays**
- **Structural maintenance of dams, reservoirs, ducts and water ducts**
- **Structural maintenance of tunnels**
- **Construction of underground works in high performance waterproof concrete**

Appearance

**Stripe**

## Certifications and legislations



### **Sanageb - Prodotti naturali per la Bioedilizia**

Product of the Sanageb line, the line of products from Azichem Srl dedicated to green-building, ecological sanitation, thermal insulation and energy saving products since 1994.

## General description

High performance hydro-expansive sealing waterstop for construction joints with safe hermetic seal for structures, masonry and foundations, made of a mixture of sodium bentonite, hydro-expansive rubber and special binding polymers ("hydrocarbon"), specifically designed to be used in contact with salt water or organic leachates. CLAYSEAL 25.20 SW has a rectangular cross section of 25x20 mm, packed in rolls of 5 m each.

## General features

CLAYSEAL 25.20 SW is a simple and easy to apply sodium bentonite waterstop; it does not require any special preparations of the media, pre-shaped seats etc. It is easily fixed by nailing and does not require any special protection. In contact with water (even salted or polluted), it increases its volume through the formation of a stable colloidal system that guarantees the permanent hermetic sealing of the connection; the initial expansion is delayed through a retardant coating with respect to the first contact with water, to avoid deformations in the initial hardening phase of the fresh concrete.

The expansion of CLAYSEAL 25.20 SW in salt water or water with leachate and pollutant content, is at least 180% (just under twice its initial volume). Potential expansion in case of contact with clean water could be significantly higher (even of the order of 1000%).

## Dosage

1.1 m/m: Use 1 metre of CLAYSEAL 25.20 SW for each linear metre, being careful to place 5-10 cm of the product alongside the end/start roll points to guarantee the permanent water tightness of the system.

## Fields of application

Producing rigid construction joints (non-expanding) and safely and permanently hydraulic sealing connections in environments with salt water, sea water, organic leachate and pollutants of various kinds (for example landfills, biogas digesters, etc.).

## Basic features



Density:  
1.4-1.5 kg/dm<sup>3</sup>



Hydroexpansive product:  
>180 %



Shelf-life:  
12 months



Temperature of use:  
-15 / +50 °C



Available colours  
Red

IF YOU WANT TO SOLVE IT  
 **azichem**

[www.azichem.com](http://www.azichem.com)

Updated: **11/09/2019**  
General sales conditions and legal  
notices on  
[www.azichem.com/disclaimer](http://www.azichem.com/disclaimer)

# Technical specifications

Longitudinal elongation at break: 60 %

Sodium bentonite content: >75 %

Unit weight (ASTM D71): 0.83 kg/m

## Substrate preparation

Prepare the smoothest and most planar laying surface, using REPAR TIX to compensate for any inhomogeneity, and accurately remove crumbling, non-adhering, powdery parts.

## Instructions for use

Apply by hand the waterstop in sodium bentonite CLAYSEAL 25.20 SW in the provided position. The product should be secured with nails: a steel nail and a washer about every 20-25 cm. The sealing of joints between the waterstop beads is ensured by the simple approach of at least 10 cm and not by overlapping the ends.


For particularly complex applications, is available the specific cage of steel wire BENTONET, with square mesh of 13x13 mm, in profiles of 1 meter each.

## Storage and preservation

Store the product in its original packing, in a fresh and dry environment, avoiding frost and direct sunlight. Inadequate storage of the product may result in a loss of rheological performance. Protect from humidity.



## Comparison of expansion with CLAYSEAL 25.20

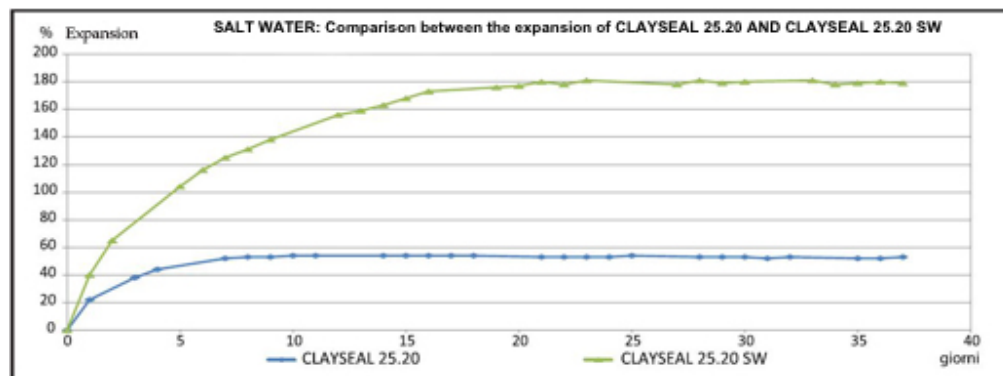

## Warnings, Precautions and Ecology

Technical and performance data outlined in this document are the result of laboratory testing conducted in a conditioned environment, as such they can result as considerably changed from operating and application conditions. The need follows to carry out preliminary tests in actual use conditions.

The user is required to check the product's most recent Material Safety Data Sheet, reporting physical-chemical and toxicological data, risk phrases and other useful information on how to safely transport, use and dispose of the product and its packaging. It is also reminded that the product and its packaging must not be dispersed in the environment for any reason.

The positioning must ensure a concrete covering of 10-12 cm in order to contain the expansive action generated by hydration.

Although the product has a delayed expansion of 48h, it is not recommended for use in cases of earlier time-frames or with excessive humidity (for example in the presence of puddles).

*CLAYSEAL25.20 SW is produced/distributed by*



Via Giovanni Gentile, 16/A - 46044 Goito (MN), Italy  
info@azichem.com Tel. +39 0376.604185 /604365 Fax +39 0376 604398



[www.azichem.com](http://www.azichem.com)

Updated: **11/09/2019**  
General sales conditions and legal  
notices on  
[www.azichem.com/disclaimer](http://www.azichem.com/disclaimer)