

TECHNICAL DATA SHEET

SECRET WALL LEVEL

revestech®

Product

Concealed shower drain for plasterboard walls with a rectangular high-performance polyurethane base, featuring a convertible siphonic/non-siphonic drain with a 40 mm horizontal outlet and **ECODRY50** waterproofing membrane adhered around its perimeter. Available in two sizes: 40 cm and 60 cm.



Description

Complete Kit for Shower Water Drainage and Wall/Floor Waterproofing 100% watertight system, designed to be installed flush with the baseboard to ensure proper water drainage without interrupting the visual continuity of the ceramic cladding. It collects water from three slopes and drains it through the ceramic joint between the floor and the wall.

Versatility


Designed to perfectly adapt to dry construction systems.
Allows the installation of all types of cladding, preferably ceramic.

Cleaning and Maintenance

The **SECRET WALL LEVEL** drain, in addition to having an antibacterial and fungicidal sanitary treatment, allows the easy removal of the front cover for access to the drain interior and siphon. According to the Technical Building Code, general maintenance and cleaning must be performed every six months, and the siphon must always contain water to prevent bad odors.

Advantages

Invisible.
Acoustic insulation.
Surface with antibacterial and fungicidal sanitary treatment.
Completely watertight.

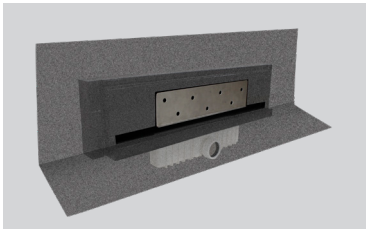

reference	product
596354074	SECRET WALL LEVEL 40
596354067	SECRET WALL LEVEL 60


TECHNICAL DATA SHEET

SECRET WALL LEVEL

revestech®

Components

1. **SECRET WALL LEVEL** drain
2. Discharge siphon
3. **ECODRY50** perimeter membrane
4. Coatable metal cover
5. Cleaning key

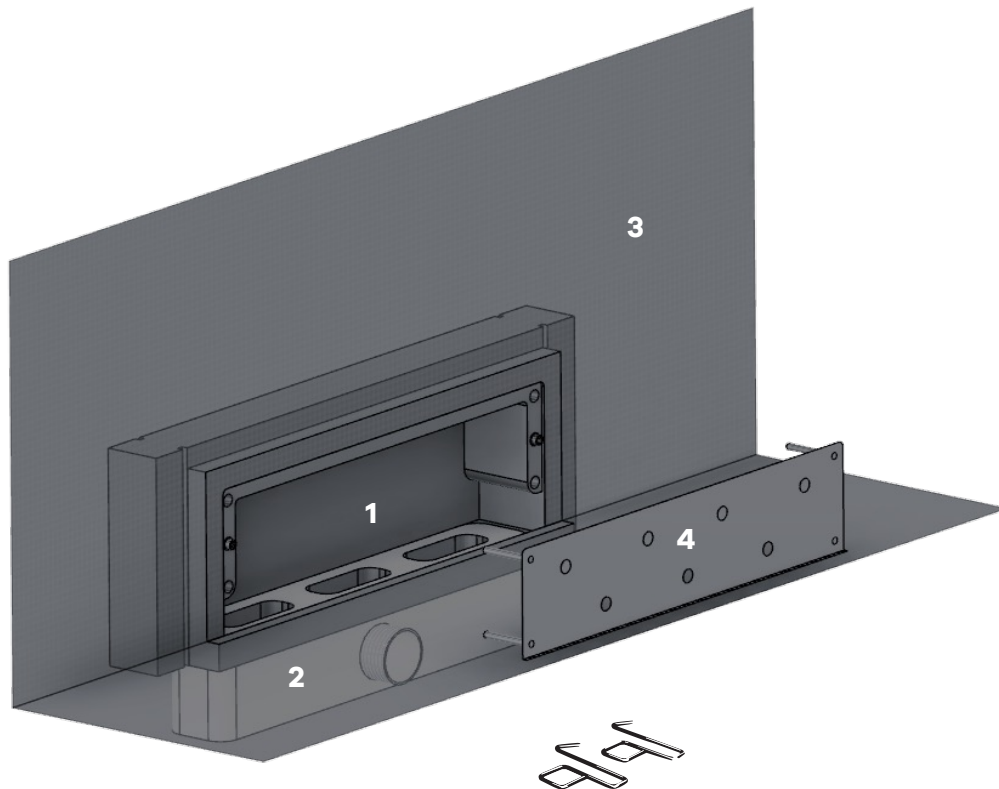


TECHNICAL DATA SHEET

SECRET WALL LEVEL

SECRET WALL LEVEL 40 drain

Material: High-performance polyurethane with antibacterial and fungicidal coating.

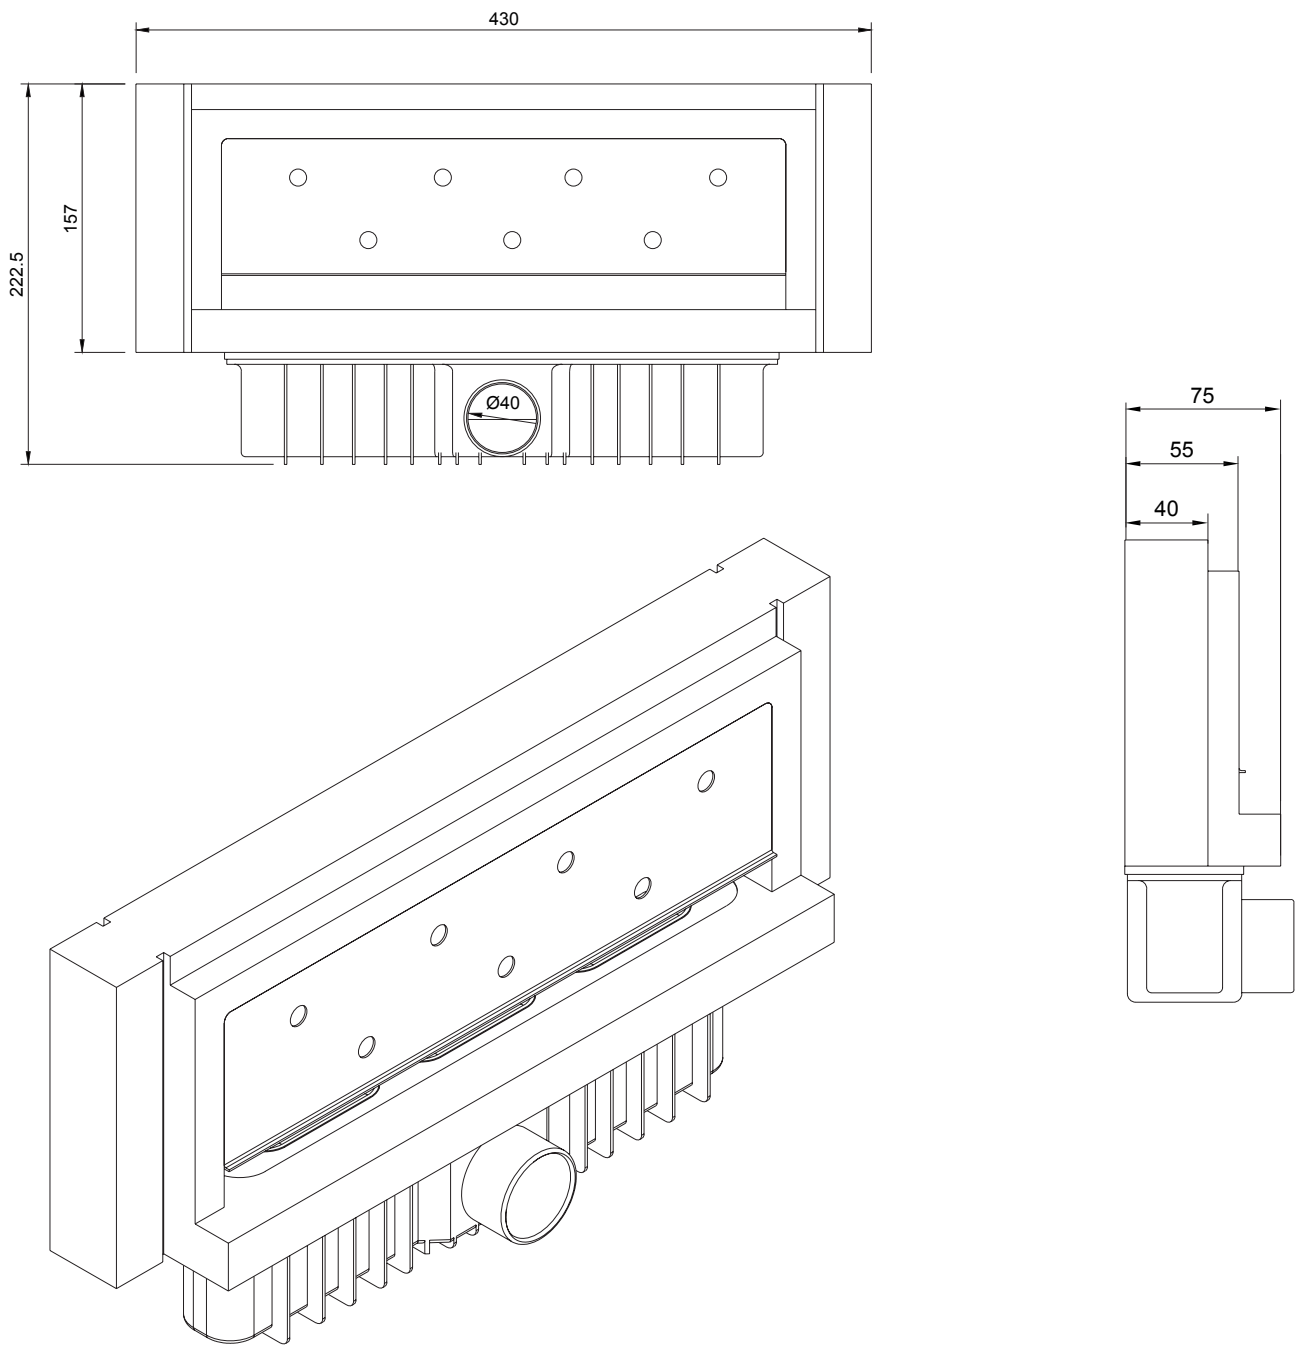


TECHNICAL DATA SHEET

SECRET WALL LEVEL

SECRET WALL LEVEL 60 drain

Material: High-performance polyurethane with antibacterial and fungicidal coating.

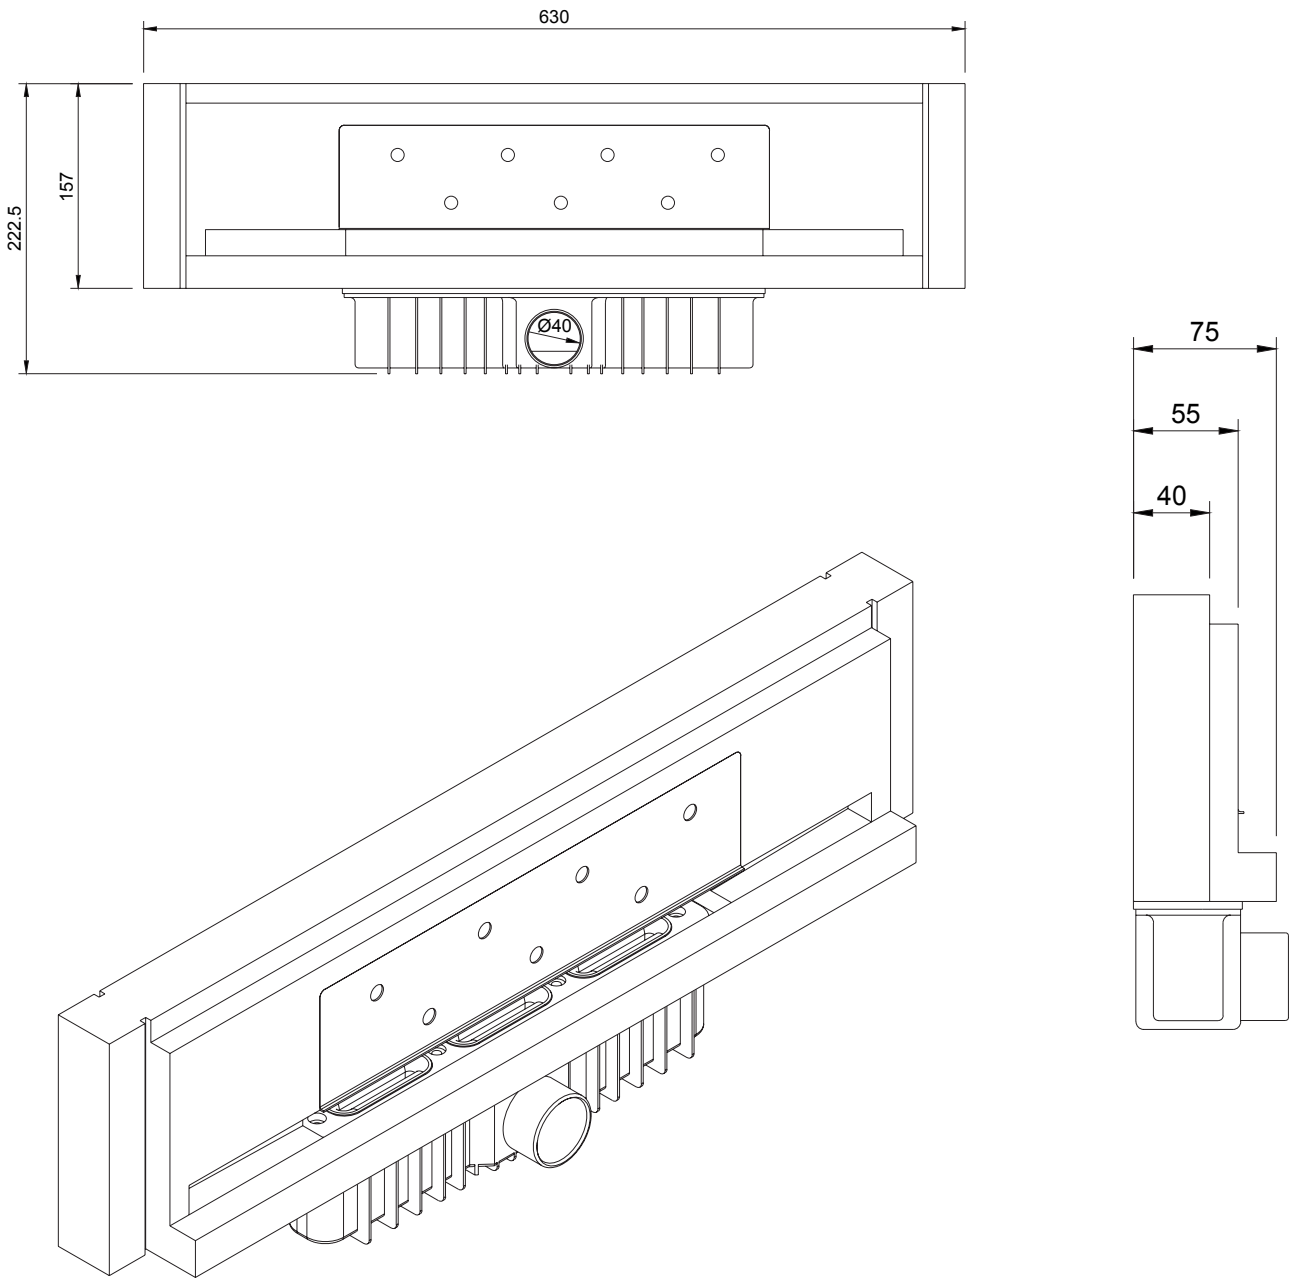

TECHNICAL DATA SHEET

SECRET WALL LEVEL

revestech®

SECRET WALL LEVEL drain			
TECHNICAL DATA OF THE DRAIN	Test Method	Unit	Value
FILLING MATERIAL: Fire classification	EN 13501-1		E
DRAIN COATING: Fire behavior test	DIN 4102-98		B2
E-Modulus (modulus of elasticity)	EN 826	kPa	55000
E-Modulus (modulus of elasticity)	EN 1607	kPa	40000
Shear modulus	EN 12090	kPa	600
Thermal conductivity at 10°C	EN 12667	W / mK	0,030*
Operating temperature limits		°C	70/130
Cleaning suitability	EN 14527		B2 55000
Durability	EN 14527		
Adhesion to concrete	EN 14891 Apdo. A.6.2		Category
Adhesion to plasterboard	EN 14891 Apdo. A.6.2		Category

* The thermal conductivity values were defined according to EN 12667 after six weeks at an average temperature of 10°C.

TECHNICAL DATA SHEET

SECRET WALL LEVEL

revestech®


DISCHARGE SIPHON

Rectangular shower drain with removable siphon.

Water reception surface: 31 mm x 298 mm.

Outlet with Ø40 mm connection nut.

Drainage speed: 0.55 l/s (tested according to UNE-EN 274-2:2002).

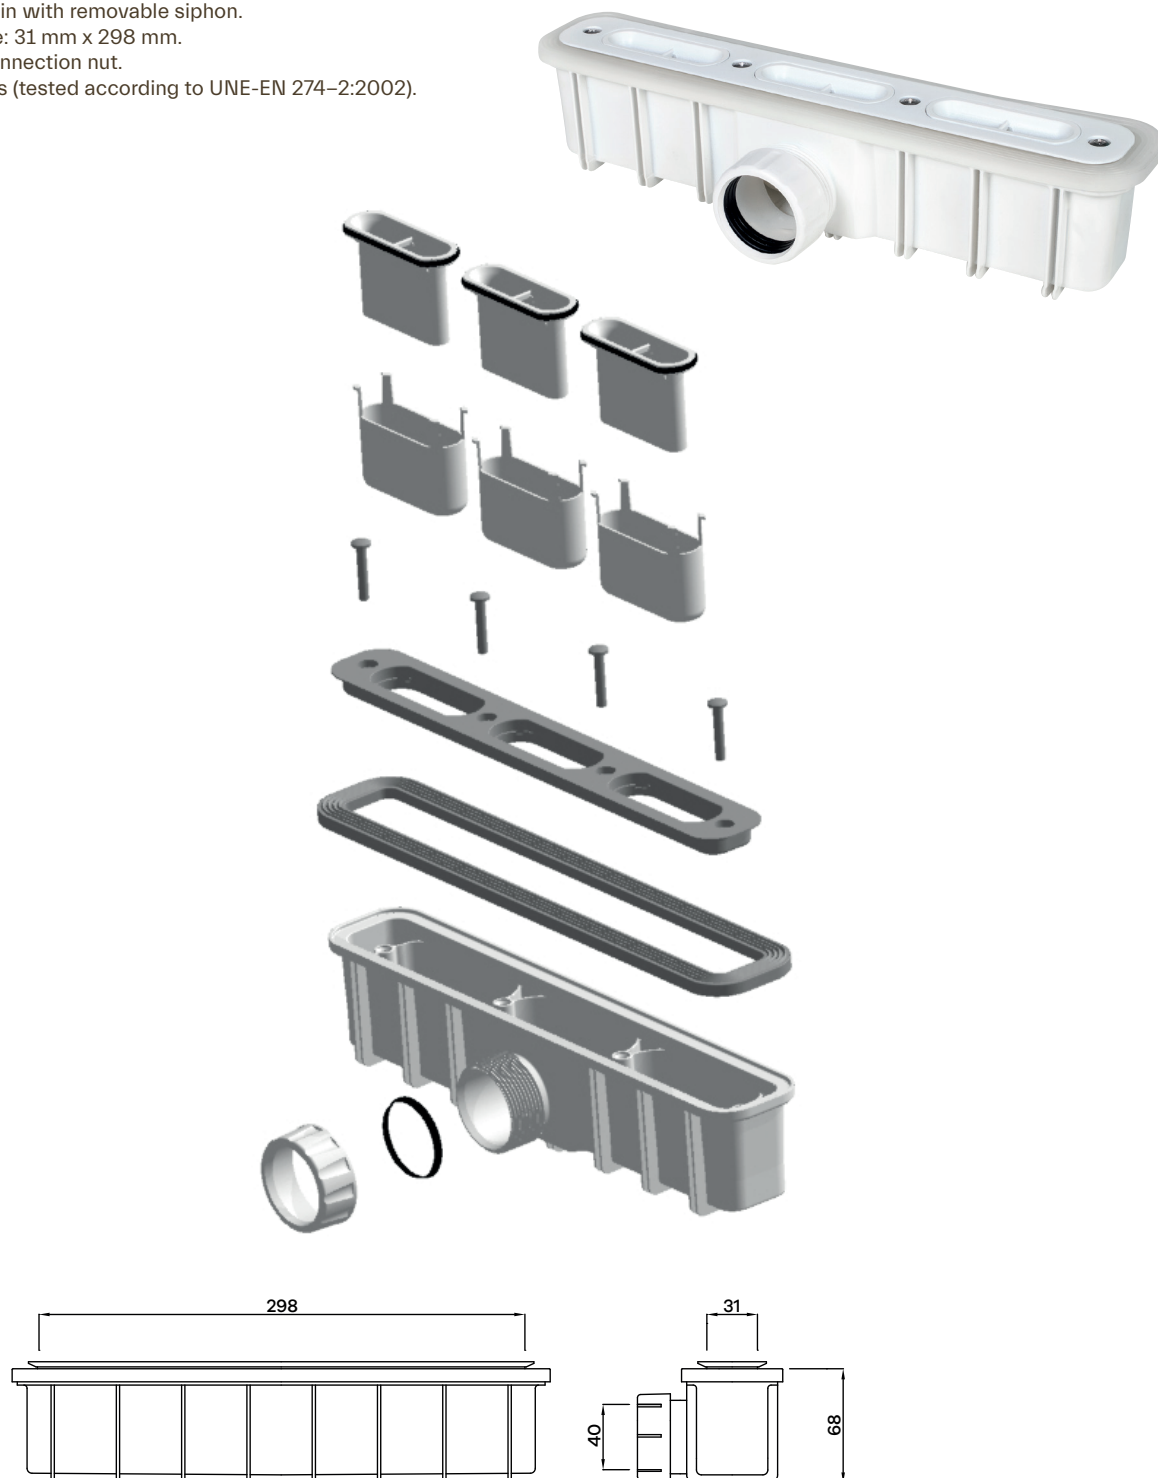

responsible
waterproofing

TECHNICAL DATA SHEET

SECRET WALL LEVEL

revestech®


ECODRY50 PERIMETER WATERPROOFING MEMBRANE

Eco-responsible membrane for treating and waterproofing horizontal and vertical junctions, thermally sealed around the entire perimeter of the drainage unit.


SCAN THIS
QR CODE TO
ACCESS
THE ECODRY50
MEMBRANE
TECHNICAL SHEET.



SECRET WALL LEVEL 40

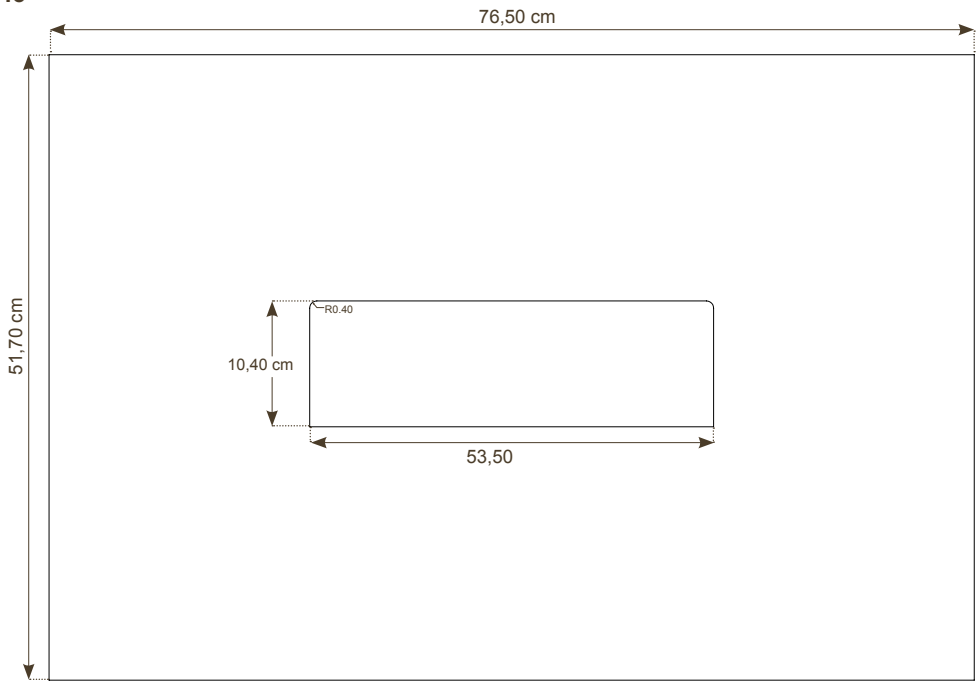

SECRET WALL LEVEL 60

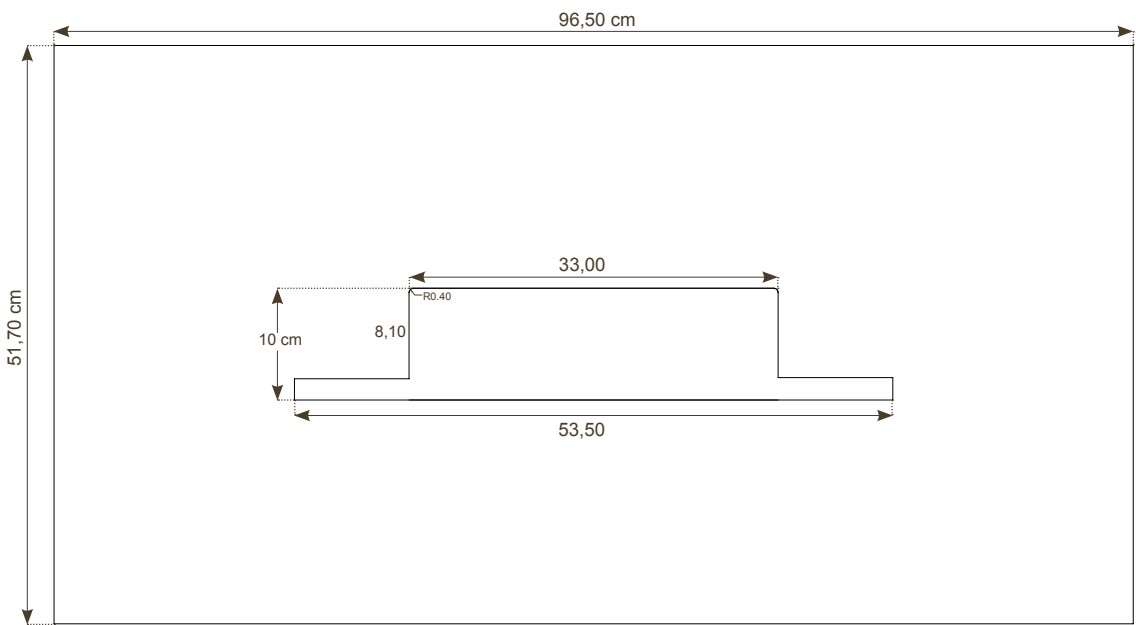


TECHNICAL DATA SHEET

SECRET WALL LEVEL

revestech®

TILEABLE METAL COVER

Stainless steel cover coatable with ceramic. Features holes to facilitate adhesion to the ceramic piece.

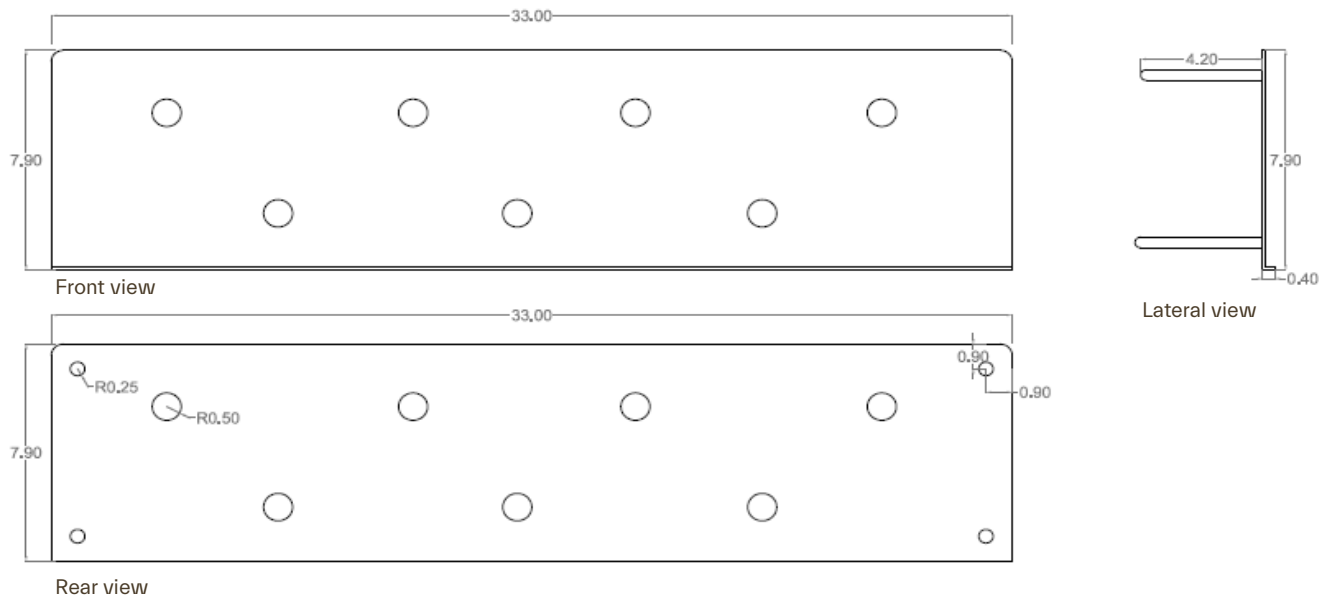

Stainless steel AISI 304, 1.5 mm thick.
Stainless steel rods Ø5 mm.
Electropolished finish.

