

DRY RAIN SPOUT

revestech®

TECHNICAL DATA SHEET

Product

Coupling for horizontal drainage.

Description

Coupling for horizontal evacuation with waterproofing membrane **DRY50** 50 x 50 cm bonded to the pvc pipe with different outlets Ø 50 / Ø 75 / Ø 90 / Ø 110 mm.

_The **DRY50** membrane joining system to the pipe is by heat sealing, guaranteeing the tightness at that critical evacuation point.

_The flexibility of the membrane favors a safe and easy installation, even in the most complicated situations.

Reference	Description	Presentation
544010748	DRY RAIN SPOUT 50	Box 1 unit Membrane 50 cm x 50 cm
544015187	DRY RAIN SPOUT 75	Box 1 unit Membrane 50 cm x 50 cm
544015613	DRY RAIN SPOUT 90	Box 1 unit Membrane 50 cm x 50 cm
544015897	DRY RAIN SPOUT 110	Box 1 unit Membrane 50 cm x 50 cm

DRY RAIN SPOUT 50

A: Ø50 mm

DRY RAIN SPOUT 75


B: Ø75 mm

DRY RAIN SPOUT 90

C: Ø90 mm

DRY RAIN SPOUT 110

E: Ø110 mm

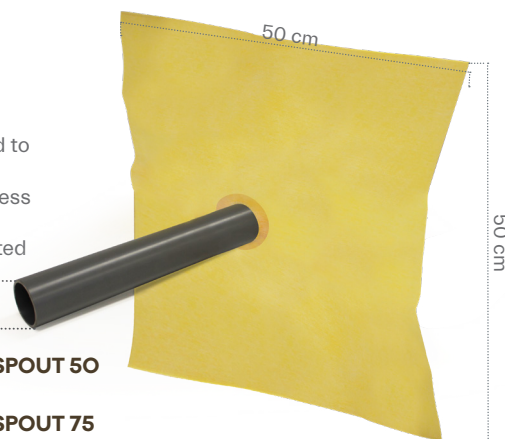

Connecting the pipe to the membrane: heatsealing

CE MARKED MEMBRANE

1170/001-DdP-2013/07/01
EN 13956:2012



Features	Test Method	Unit	Tolerance	Value
Water tightness	EN 1928 Meth. B			PASS
Tensile strength	EN 12311-2 Meth. A	N/50 mm	MLV: L ≥ 395 MLV: T ≥ 130	L=395 T=130
Elongation	EN 12311-2 Meth. A	%	MLV: L ≥ 23 MLV: T ≥ 190	L=23 T=190
Overlap resistance	EN 12317-2	N/50 mm	MLV ≥ 110	110
Impact resistance	EN 12691	mm		PND
Static load resistance	EN 12730 Meth. B	Kg	MLV ≥ 20	20
Pliability at low temperature	EN 495-5	°C	MLV -40	-40
Reaction to fire	EN 13501-1	Euroclases		F
Length				see dimensions in picture
Weight	EN 1849-2	g/m ²	MDV: -5% e +10%	335
Thickness	EN 1849-2	mm	MDV: -5% e +10%	0,52
Visible defects	EN 1850-2			PASS
Straightness	EN 1848-2	mm	MLV: g ≤ 50	g=50
Flatness	EN 1848-2	mm	MLV: p ≤ 10	p=10
Resistance to diffusion water vapour	UNE-EN 1931:2001	m ² ·h·Pa/mg		9,75

MDV: Manufacturer's Declared Value. PND: No Performance Determined. MLV: Manufacturer's Limiting Value.

Features / TUBE	Test Method	Unit	Value
Length		cm	30
Tube outlet diameter (Ø outdoor)		mm	A: Ø 50, B: Ø 75, C: Ø 90 E: Ø 110
Thickness		mm	3
Composition	PVC grey as standard UNE-EN 1453 and UNE-EN 13501		

Storage

Store in original unopened packing, protect from moisture, in place properly ventilated at a maximum temperature of 30°C.

Protect from direct sunlight.



revestech®
C/La Rioja,4
03006
Alicante
Spain

responsible
waterproofing