

SUMI BASIC

TECHNICAL DATA SHEET

revestech®

Description

BASIC drain kit and 10.5 x 10.5 cm square grate with perforated squares design finish, 25 x 25 cm **DRY40** waterproofing membrane heat-sealed to the cover and 1.5 x 2 m (3 m²) **DRY40** membrane.


For additional information about membrane, go to **DRY40** membrane technical data sheet.



BASIC DRAIN

Features	Test Method	Unit	Value
Height		mm	60
Outlet			Horizontal
Output diameter		mm	40/50H
Flow rate		l/s	0,60
Effects of chemical products	Stable with products normally used with ceramic tiles, cleaning and maintenance.		
Colour	Grey		
Composition of drain waste and top ring	ABS		

Membrane bonded / waste: heat sealed

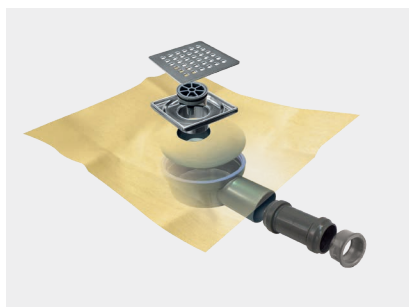

reference	product	membrane	description
544018423	SUMI BASIC	25 x 25 cm	Total height (drain + grate): 60 mm.



responsible
waterproofing

SUMI BASIC


TECHNICAL DATA SHEET

revestech®

GRATE AND CHANNEL

Features	Test Method	Unit	Value
Grid measures		mm	Check drawings bellow
Effects of chemical products	Stable with products normally used with ceramic tiles, cleaning and maintenance.		
Composition	Grid: Stainless steel AISI 304; Acerinox: austenitic stainless steel with Cr-Ni coded ACX.		
Colour	Grey		

Measures

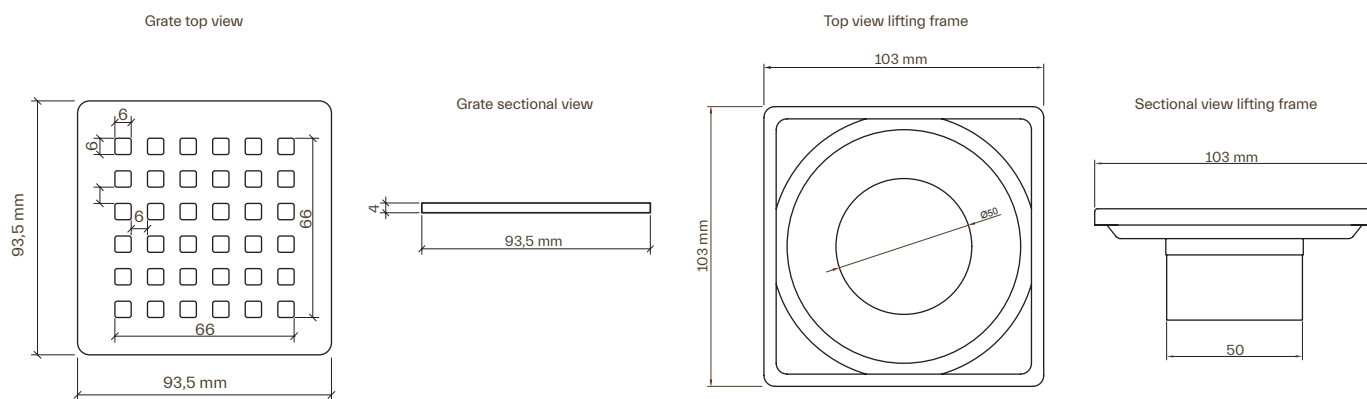

responsible
waterproofing